

The Valiant

“The Wheelbarrow for the 21st Century”



The Valiant Galvanised is everything you want in a wheelbarrow. Designed for everyday use in construction, agricultural, DIY, and horticultural work. This multi-purpose wheelbarrow is a workhorse for the builder and the enthusiast.

The Valiant


The Valiant Galvanised has been newly developed for the 21st Century continuing the high standards of our company.

Stronger and More Durable

- eye-catching, extra strengthened tubular front pan support
- reinforced pan sides with unique "W" stamping
- restyled welded leg frame with superior fittings underneath the wheelbarrow pan
- extra-strong double rolled and wide-edged pressed steel pan
- high-impact polypropylene wheel with heavy duty brackets
- tough, epoxy-polyester powder paint finish

Safer with Superior "Tipability"

- greater manoeuvrability with low centre of gravity and optimum working position
- improved balance and weight distribution when loaded
- easy passage through doorways with unique pan and frame design
- resistance-free, smooth pan surface with reinforced holes
- easy-to-change wheel assembly
- added comfort with fitted handle grips

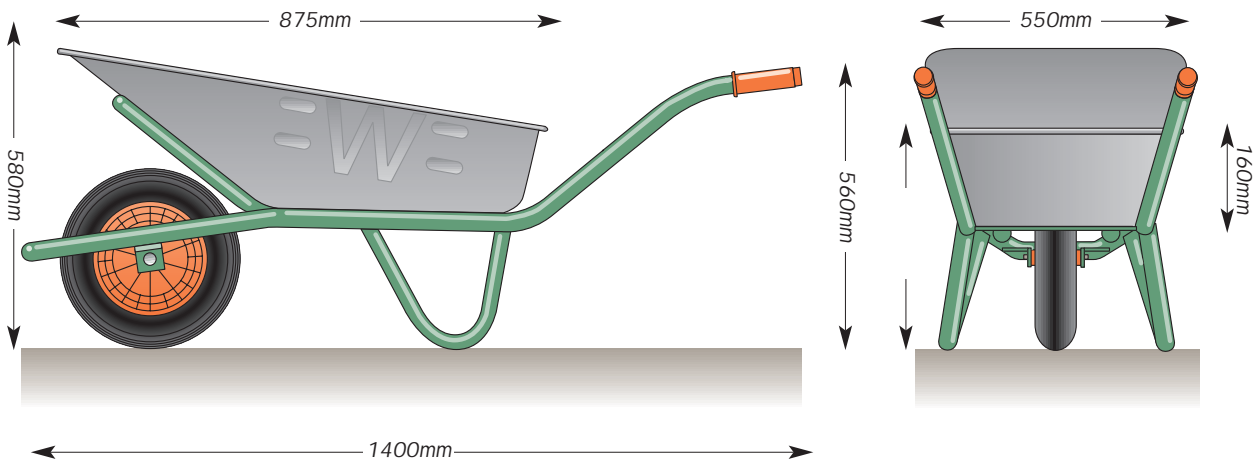

TECHNICAL SPECIFICATIONS

Description - Code	VBP	VBS	VGP	VGS	VGVP	VGVS	VBPX	VBSX	VGPX	VGSX
Weight of Wheelbarrow	14.5kg	16.5kg	14.5kg	16.5kg	14.5kg	16.5kg	17.3kg	19.3kg	17.3kg	19.3kg
Colour of Wheelbarrow	Black	Black	Green	Green	Galvanised	Galvanised	Black	Black	Green	Green
Wheelbarrow Pan										
Pan Struck (level) Capacity	85L	85L	85L	85L	85L	85L	85L	85L	85L	85L
Pan Gauge	0.8mm	0.8mm	0.8mm	0.8mm	0.8mm	0.8mm	1.2mm	1.2mm	1.2mm	1.2mm
Wheelbarrow Frame										
Tubular Steel Mainframe	30mm	30mm	30mm	30mm	30mm	30mm	30mm	30mm	30mm	30mm
Tubular Steel Leg	25mm	25mm	25mm	25mm	25mm	25mm	25mm	25mm	25mm	25mm
Tubular Front Pan Support	30mm	30mm	30mm	30mm	30mm	30mm	30mm	30mm	30mm	30mm
Handle Grips	Fitted	Fitted	Fitted	Fitted	Fitted	Fitted	Fitted	Fitted	Fitted	Fitted
Wheelbarrow Wheel										
Type of Tyre	Pneumatic	Solid rubber	Pneumatic	Solid rubber	Pneumatic	Solid rubber	Pneumatic	Solid rubber	Pneumatic	Solid rubber
Tyre Size	3.5 x 8"	330 x 75mm	3.5 x 8"	330 x 75mm	3.5 x 8"	330 x 75mm	3.5 x 8"	330 x 75mm	3.5 x 8"	330 x 75mm



The Walsall Wheelbarrow Company Ltd
Units 10-12, Phoenix Road
off Neachells Lane, Wednesfield
West Midlands WV11 3PX

Tel: +44 (0)1902 304002

Fax: +44 (0)1902 306595

E-mail: sales@thewalsallwheelbarrow.co.uk

Web site: www.thewalsallwheelbarrow.co.uk